

# Viti autofilettanti

## A testa 1/2 tonda con impronta a croce


Half round head tapping screws.  
Product grade C.




Tolleranze di lavorazione UNI EN ISO 4759/1. Categoria A.

Materiale **Acciaio carbonitrurato**

# C15

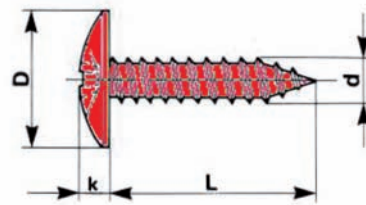

Impronta Ph



Dimensioni in mm.

| Nominale d | 2,9  | 3,5                 | 3,9  | 4,2  | 4,8   | 5,5   |
|------------|------|---------------------|------|------|-------|-------|
| D          | 6,55 | 8,16                | 8,95 | 9,75 | 11,38 | 12,98 |
| k          | 1,52 | 2,18                | 2,39 | 2,59 | 3     | 3,4   |
| L = 6,5    | 0,45 | PER 1000 PEZZI ≈ Kg |      |      |       |       |
| 9,5        | 0,54 | 1,05                | 1,10 |      |       |       |
| 13         | 0,66 | 1,20                | 1,30 | 1,50 |       |       |
| 16         |      | 1,40                | 1,50 | 1,80 | 2,50  | 3,40  |
| 19         |      |                     | 1,70 | 1,95 | 2,80  | 3,80  |
| 22         |      |                     |      | 2,20 | 3,10  | 4,20  |
| 25         |      |                     |      |      | 3,40  | 4,50  |
| 32         |      |                     |      |      | 4,10  | 5,50  |

### Note

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

• Le masse, date a titolo indicativo, sono calcolate in base alla massa volumica 7,85 Kg/dm<sup>3</sup>